

MHP13/35

TRAILER MOUNTED BOOM LIFT



- Safe and stable working height of up to 12.6m
- Heavy duty trailer mounted articulated boom lift
- Robust steel platform with two man capacity
- Easy to use outrigger/boom safety interlocks
- Ideal for a wide range of construction, building and maintenance applications

 **snorkel**
www.elevatedaccess.co.nz

TRAILER MOUNTED BOOM LIFTS MHP13/35

DIMENSIONS

MPH13/35

| | |
|--|-----------------------|
| Max. working height | 12.6m |
| Max. platform height (A) | 10.6m |
| Horizontal outreach | 5.6m at 6m |
| Platform size | 1.25m x 0.78m x 1.07m |
| Outrigger footprint | 3.7m x 3.9m |
| Overall width (outriggers extended) | 3.95m |
| Overall width (outriggers retracted) (B) | 1.58m |
| Overall length (C) | 5.99m |
| Transport height (D) | 2.05m |

PERFORMANCE

| | |
|----------------------------------|---------------------|
| Platform capacity | 227kg |
| Platform capacity (with rotator) | 200kg |
| Max. wind speed | 12.5m/sec |
| Max. towing speed | 80km/h |
| Levelling | Mechanical |
| Turntable rotation | 540° non-continuous |
| Tyres | 185 R14 |
| Brakes | Hydraulic disc |
| Max. axle capacity | 1,750kg |
| Trailer tongue weight | 65kg |



POWER

| | |
|------------------|--------------------------------|
| Power source | Honda petrol engine 5.5hp |
| Hydraulic system | Proportional electro/hydraulic |

WEIGHT

| | |
|--------------|---------|
| Gross weight | 1,360kg |
|--------------|---------|

WORKING ENVELOPE

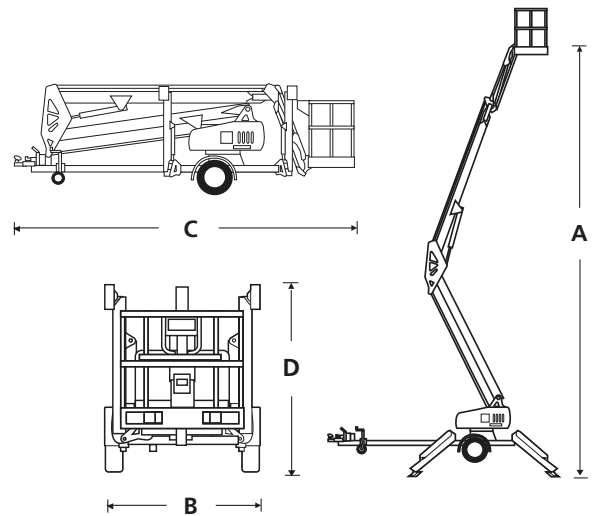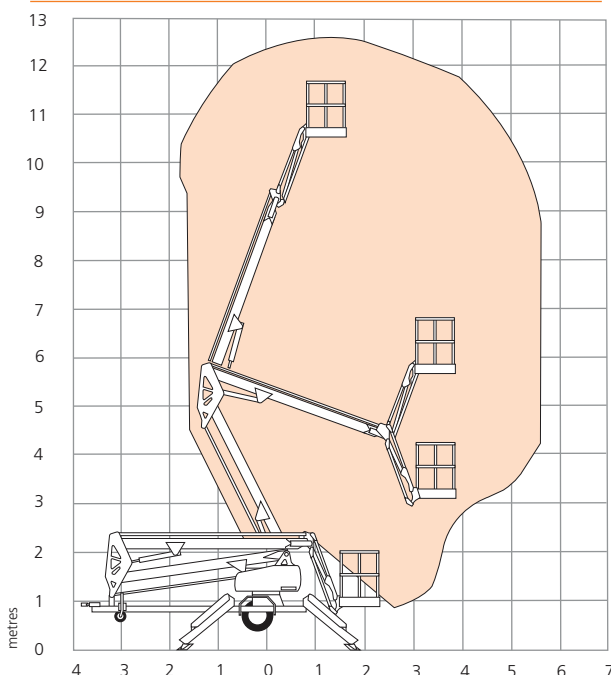

STANDARD FEATURES

- High strength steel boom and base construction
- Proportional speed control
- Heavy duty tow coupling
- Heavy duty jockey wheel
- Hydraulic disc brakes
- Reliable petrol engine
- Versatile jib boom (+70° to -70°)
- Articulating boom sections for 'up & over' reach
- 600V AC rated cable to platform
- Two man steel platform
- Automatic stabilisers
- Outrigger/boom safety interlocks
- Lockable hinged covers
- Hour meter
- Lifting lugs
- Independently operated hydraulic outriggers

OPTIONS

- 360° continuous rotation turntable
- Flashing light
- 110/240V AC GFCI power to platform
- Platform rotator
- Diesel and Bi-energy options



09 947 4247

021 500 486

sales@elevatedaccess.co.nz

www.elevatedaccess.co.nz